

 **Adjustable gap filter type MF-400^{Pat.pend}**

 **Einstellbarer Spaltfilter Typ MF-400^{Pat.pend}**

 **Justerbart spaltfilter typ MF-400^{Pat.pend}**



- Adjustable gap, interval 0,05mm (between 0,1 - 0,7mm)
- Economic filtration
- Easy to spray clean
- Little preassure loss
- Large flow area



- Einstellbar Spalt, Intervalle 0,05mm (zwischen 0,1 - 0,7mm)
- Schonende Filtrierung
- Leicht Sauber zu spritzen
- Geringer Druckverlust
- Große Durchsatzöffnung



- Justerbar spalt, intervall 0,05mm (mellan 0,1 - 0,7mm)
- Skonsam filtrering
- Lätt att renspruta
- Liten tryckförlust
- Stor genomströmningsarea



🇬🇧 **Ajustable gap filter type MF-400**^{Pat.pend}

🇩🇪 **Einstellbarer Spaltfilter Typ MF-400**^{Pat.pend}

🇸🇪 **Justerbart spaltfilter typ MF-400**^{Pat.pend}




- Adjustable gap, interval 0,05mm (between 0,1 - 0,7mm)
- Economic filtration
- Easy to spray clean
- Little preassure loss
- Large flow area



- Einstellbar Spalt, Intervalle 0,05mm (zwischen 0,1 - 0,7mm)
- Schonende Filtrierung
- Leicht Sauber zu spritzen
- Geringer Druckverlust
- Große Durchsatzöffnung



- Justerbar spalt, intervall 0,05mm (mellan 0,1 - 0,7mm)
- Skonsam filtrering
- Lätt att renspruta
- Liten tryckförlust
- Stor genomströmningsarea

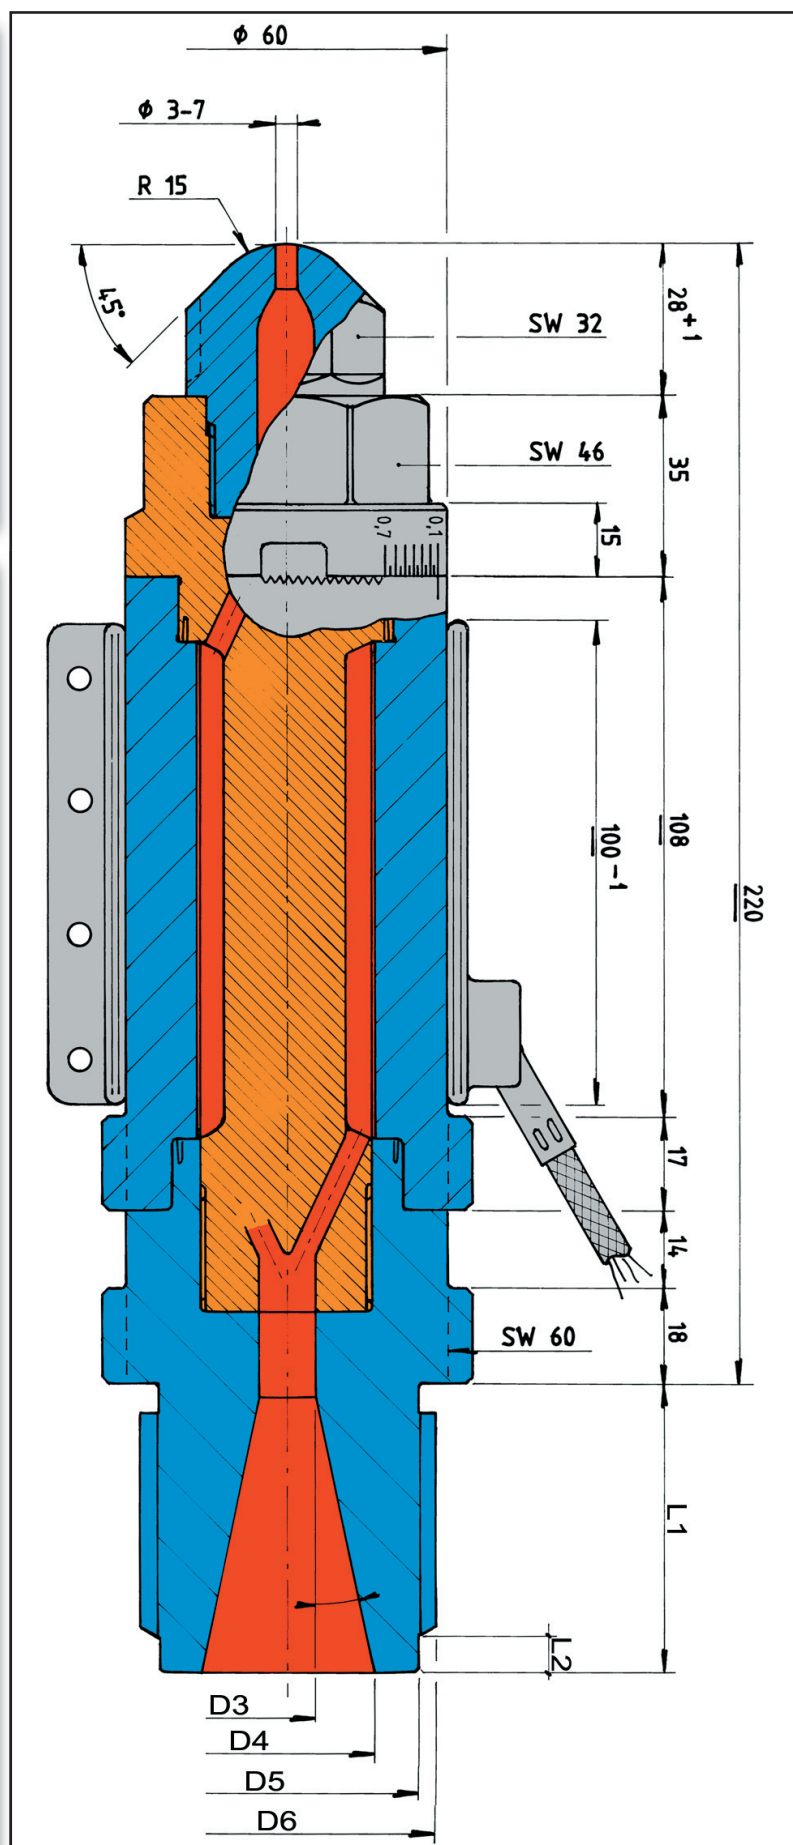

H.M. H.MÜLLER MEKANISKA AB

H. Müller Mekaniska AB
Stämpelgatan 9
S-50494 Borås
Sweden

Tel. +46 33 222190
Fax. +46 33 222199
www.mullermekaniska.se
info@mullermekaniska.se